


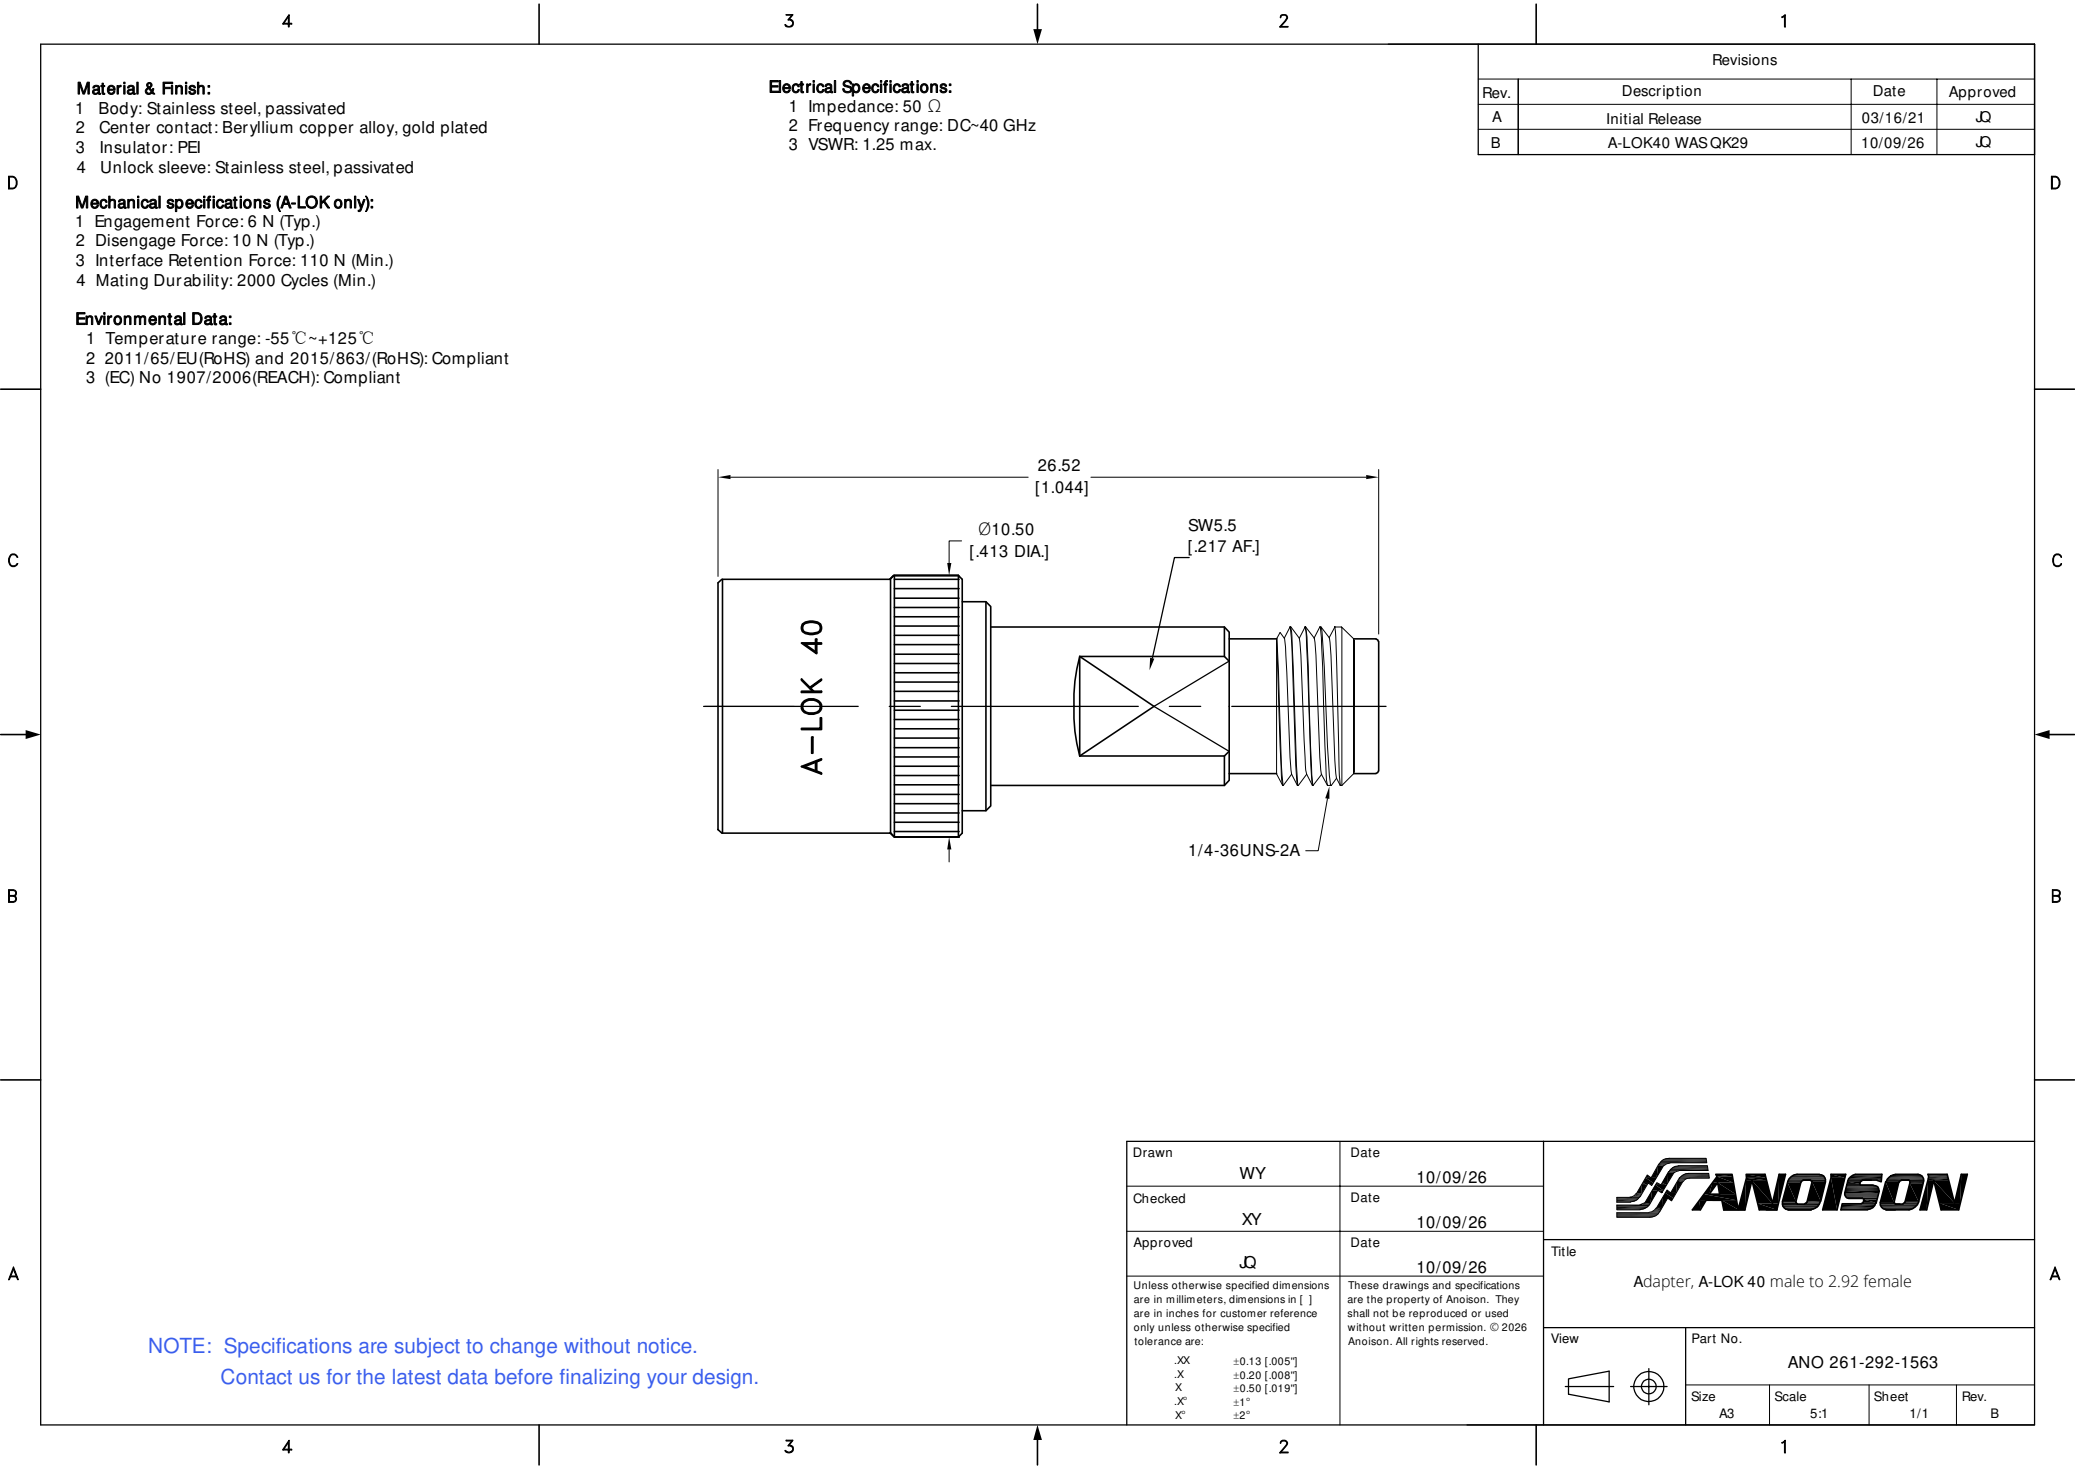


Revisions			
Rev.	Description	Date	Approved
A	Initial Release	03/16/21	JQ
B	A-LOK40 WASQK29	10/09/26	JQ

Material & Finish:
1 Body: Stainless steel, passivated
2 Center contact: Beryllium copper alloy, gold plated
3 Insulator: PEI
4 Unlock sleeve: Stainless steel, passivated

Electrical Specifications:
1 Impedance: 50 Ω
2 Frequency range: DC~40 GHz
3 VSWR: 1.25 max.

Mechanical specifications (A-LOK only):
1 Engagement Force: 6 N (Typ.)
2 Disengage Force: 10 N (Typ.)
3 Interface Retention Force: 110 N (Min.)
4 Mating Durability: 2000 Cycles (Min.)

Environmental Data:
1 Temperature range: -55°C~+125°C
2 2011/65/EU (RoHS) and 2015/863/(RoHS): Compliant
3 (EC) No 1907/2006 (REACH): Compliant

Drawn	WY	Date	10/09/26				
Checked	XY	Date	10/09/26				
Approved	JQ	Date	10/09/26				
Unless otherwise specified dimensions are in millimeters, dimensions in [] are in inches for customer reference only unless otherwise specified tolerance are:		These drawings and specifications are the property of Anoisson. They shall not be reproduced or used without written permission. © 2026 Anoisson. All rights reserved.		Title Adapter, A-LOK 40 male to 2.92 female			
.0X ±0.13 [.005"] .X ±0.20 [.008"] X ±0.50 [.019"] .X° ±1° X° ±2°				View 	Part No. ANO 261-292-1563		
				Size A3	Scale 5:1	Sheet 1/1	Rev. B

NOTE: Specifications are subject to change without notice.
Contact us for the latest data before finalizing your design.